

SIMPLE INSTRUCTIONS TT4-0SQ – REMINDING CLOCK



FUNCTIONS OF THE TIMER

- TIME – The current time is shown on the device
- ALARM (up to 4 per day) - Repeats at same times each day without reprogramming
- DURATION – Alarm sounds 3 times then every minute until confirmed
- EASY STOP - simply press RED button to stop the alarm and the device will automatically sound at the next programmed time
- OPTIONS (Sound, or Flashing Light chosen by switch on back)

MODE – allows you to move around the 4 different alarms and time display

SET – allows you to set the time and alarms

UP – allows you to change the settings of the time/alarms



QUICK DEMO

1. Press the 'MODE' button repeatedly
Each time you press you will hear the alarm sound or flashing light, depending on the alarm or light setting, chosen by the switch on the back
This should give the customer a good indication of the alarm sound and/or light demo
2. Return to the time display by pressing the MODE button,
or wait approx 10 seconds and the device will automatically go back to time display.

TO TURN ON SOUND OR FLASHING LIGHT

1. Locate the switch at the back and slide the switch to SOUND OR LIGHT as required.

TO SET THE TIME

1. When you are on the normal date and time screen
– to enter programming mode, press 'SET' – the hours will flash
2. To change the hour press 'UP' until you reach the correct hour.
(Ensure that the 'PM' indicator is showing if you need the hour to be PM, or not showing if you need AM.
The indicator is in the top row above the hours - PM visible for PM, blank for AM.)
3. Press 'SET' to move to the minutes
4. To change the minutes press 'UP' until you reach the correct minutes
5. Press 'SET' and you will return to the current time with colon ':' flashing

PLEASE NOTE: If you do not press anything for 10 seconds the device will return to the current time setting and you will need to start again.

TO SET THE ALARMS

PLEASE NOTE: If you do not press anything for 10 seconds the device will return to the current time setting and you will need to start again.

1. When you are on the normal date and time screen, black solid dots along the bottom of the LCD screen indicate if the alarms are on or off. If you see no dots then all alarms are turned off.
2. When you are on the normal date and time screen
 - press 'MODE' once to move to the ALARM function
 - The alarm number 1-4 will be shown along the bottom of the LCD by a flashing dot
3. To change the alarm time press the 'SET' button. The hours should be flashing
4. To change the hour for the alarm press the 'UP' button
(Ensure that the 'PM' indicator is showing if you need the hour to be PM, or not showing if you need AM. The indicator is in the top row above the hours - PM visible for PM, blank for AM.)
5. Press 'SET' to move to the minutes
6. Press 'UP' to change the minutes of the alarm
7. Press 'SET' to confirm the alarm time
8. To set another alarm press 'MODE' to move to the next alarm number
9. To set additional alarms continue from point 3 above
10. Once you have set all alarms – press 'MODE' to return to the current time display with colon ':' flashing


TO ACTIVATE THE ALARMS (ON/OFF)

1. When you are on the normal date and time screen, black solid dots along the bottom of the LCD screen indicate if the alarms are on or off. If you see no dots then all alarms are turned off.
2. To activate each alarm use the 'MODE' button to go to each alarm & press 'UP' on each alarm to activate
 - a. Press 'MODE' to move to the first ALARM
 - b. a flashing dot indicates alarm OFF, solid dot indicates alarm ON
 - c. Use the 'UP' button to alternate between flashing (OFF) and solid (ON)
 - d. Press 'MODE' to move to the next alarm, and 'UP' to turn ON/OFF
 - e. Continue for each alarm
3. Press Mode to return to the normal time display, or wait 10 seconds
4. When you are on the normal date and time screen, black solid dots along the bottom of the LCD screen indicate if the alarms are on or off. If you see no dots the all alarms are turned off.

Instruction Manual of Pill Reminding Clock - TT4-0SQ

Features

- Displays current time - hour and minute
- Power Saving Alert (PSA), reminder repeats three times every minute until "CONFIRM" key is pressed.
- Up to four reminders a day
- Two methods of reminder alert – audible or visual
- Clip with a hanging hole, and a hidden magnet on the backside – can stand on desk, be mounted on wall, clipped anywhere, and attached on refrigerator or any iron surface
- Use 2 pcs of UM4 (AAA) battery





Keys

1. MODE/CONFIRM – Used to enter each reminder mode, to return to real time, to confirm dose is taken or job is done, and to stop the reminder alert
2. SET – To enter programming mode of real time or each reminder alarm time
3. UP – To adjust the real time, and each alarm time, or to enable and disable each reminder

How to Select Reminding Method – Audible or Visual

Refer to Fig. b, use switch on the backside to select audible or visual alert.

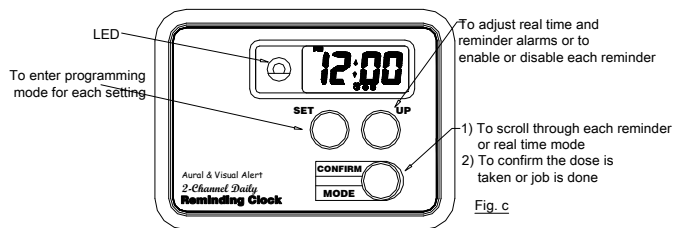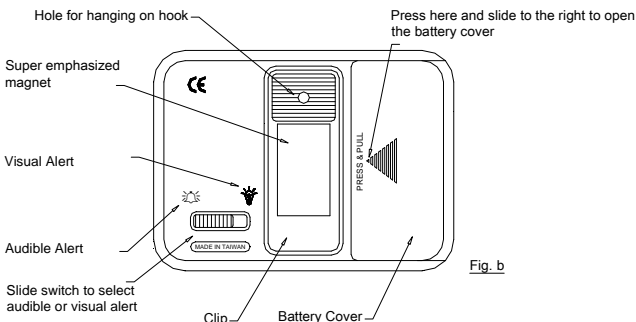

How to Install Battery

Remove battery cover as shown in Fig b. Install two pcs of UM4 (AAA) battery in proper position as indicated. The LCD screen is displayed fully for 3 seconds, then returns to real time mode. At the same time the reminding alert, (audible or visual depends on what method you choose) is activated for 3 seconds.

How to Set Real Time

1. At real time mode press "SET" key to set the hour, the reading of "hour" starts to flash. Use "UP" key to adjust the hour.
2. Press "SET" key again to set the minute, the reading of minute starts to flash. Use "UP" to adjust the minute.
3. Press "MODE" again to finish time setting and return to real time.

How to Set Reminder Time(s)

At real time mode, press the 'MODE' button once to scroll to the 1st Reminder Alarm setting. The Reminder Mode symbol displays solid with 1st reminder symbol flashing, indicating it is not yet enabled, as shown in Fig a.. To adjust the reminder time, use the same method you used when you set the real time, as in the above paragraph. Once set, make sure the "Hour" and "Minute" reading are displayed solid, indicating it is enabled. If the 1st reminder symbol is flashing (refer Fig. a). This means the 1st reminder is not yet enabled. Press "UP" to enable it. Then the symbol becomes solid. If "UP" is pressed again, the reminder is disabled and the symbol starts to flash again. Repeat pressing "MODE" to scroll to the 2nd, 3rd, or 4th reminder, and apply the same method to set each reminder.

How to Know the Reminder is Turned On

At real time, if the reminder symbol appears for a certain reminder, as shown in Fig a., then that reminder is turned on. If the symbol does not appear for a certain reminder, then that reminder is turned off.

How to Enable or Disable Each Reminder

At real time mode, repeatedly press "MODE" to scroll to the reminder, which you are going to enable. If the reminder symbol is flashing then it is not enabled. Press "UP" to enable it. The related symbol should become solid. Then repeatedly press "MODE" to return to real time, or wait for 10 seconds and the display will return to real time automatically.

How to Confirm the Reminding Alert

The symbols of all enabled reminders should display solid at real time mode. When a certain reminder time arrives, its related symbol starts to flash and reminding alert goes off for three times every minute. You should press the "CONFIRM" key to confirm dose is taken or job is done, as indicated on Fig. c. Otherwise, the reminding alert will never stop. After "CONFIRM" key is pressed the flashing symbol changes to solid. It will repeat again the next day at the same time. Be sure to use the same method to confirm the reminder and stop the alert. If your need for a reminder becomes unnecessary, then follow the instruction above to disable the reminder.